



GNSOURCE

The word "GNSOURCE" is displayed in a large, bold, black, sans-serif font. The letters "N" and "S" are highlighted with a thick green outline. The letters "O", "U", "R", and "C" are highlighted with a thick red outline. The letters "E" and "S" are highlighted with a thick green outline.

LED FLAT INTERIOR LIGHT

SHOWCASE



FEATURES

PRO-GRADE LIGHTING

- Top grade LEDs for efficient lighting.
- Diffused lens for maintaining brightness and reducing harshness.
- 120-degree beam spread for wide visibility.
- Multiple LED color options.

PRO-GRADE ELECTRONICS

- Touch dimmer switch & proximity sensor options.
- Ultra low current draw for start battery compatibility.
- Battery rechargeable options.

PRO-GRADE CONSTRUCTION

- Sleek, pleasant styling.
- Robust and tough aluminum+plastic build

OPTIMAL USE CASES

Interior of any storage or mobile cabin

- Caravans, RVs, motorhomes, etc.
- Trailers, mobile kitchens, mobile fridges, etc.
- Gun cabinets, work desks, display shelves, etc.

BASIC INFO


Electrical/Optical Properties	
Light Source	SANAN SMD3014 LEDs 260mm: 48pcs 410mm: 78pcs
Beam angle	120°
Luminosity (white)	260mm: 140lm 410mm: 230lm
Power Consumption	260mm: 2.3W 410mm: 3.7W
Proximity Sensor Specs	Cone angle: 120° Effective distance: 2m

Material Properties	
Size	41mm (W) x 9mm (H)
Housing Material	Aluminum + polycarbonate
Lens Material	UV stabilized, coated polycarbonate
Cable specs (12V model)	500mm, 18 AWG
Battery specs (Rechargeable model)	3.7V, 1500mAh
Ingress Protection Rating	IP20
Working Temperature	-40 °C - 120 °C
Certifications	RoHS, CE, FCC, C-Tick, E-mark
Lifespan	50000 hrs+
Warranty	2 yrs

OPTIONS

Length Options	LED Color Options	Function Options
<ul style="list-style-type: none">• 260mm• 410mm	<ul style="list-style-type: none">• White¹ + Amber• White¹ + Red• More...	<ul style="list-style-type: none">• 12V Wired + Touch Dimmer• 5V Rechargeable + Proximity Sensor

1) White color temperature preconfigurable, CCT 2700K ~ 6500K.

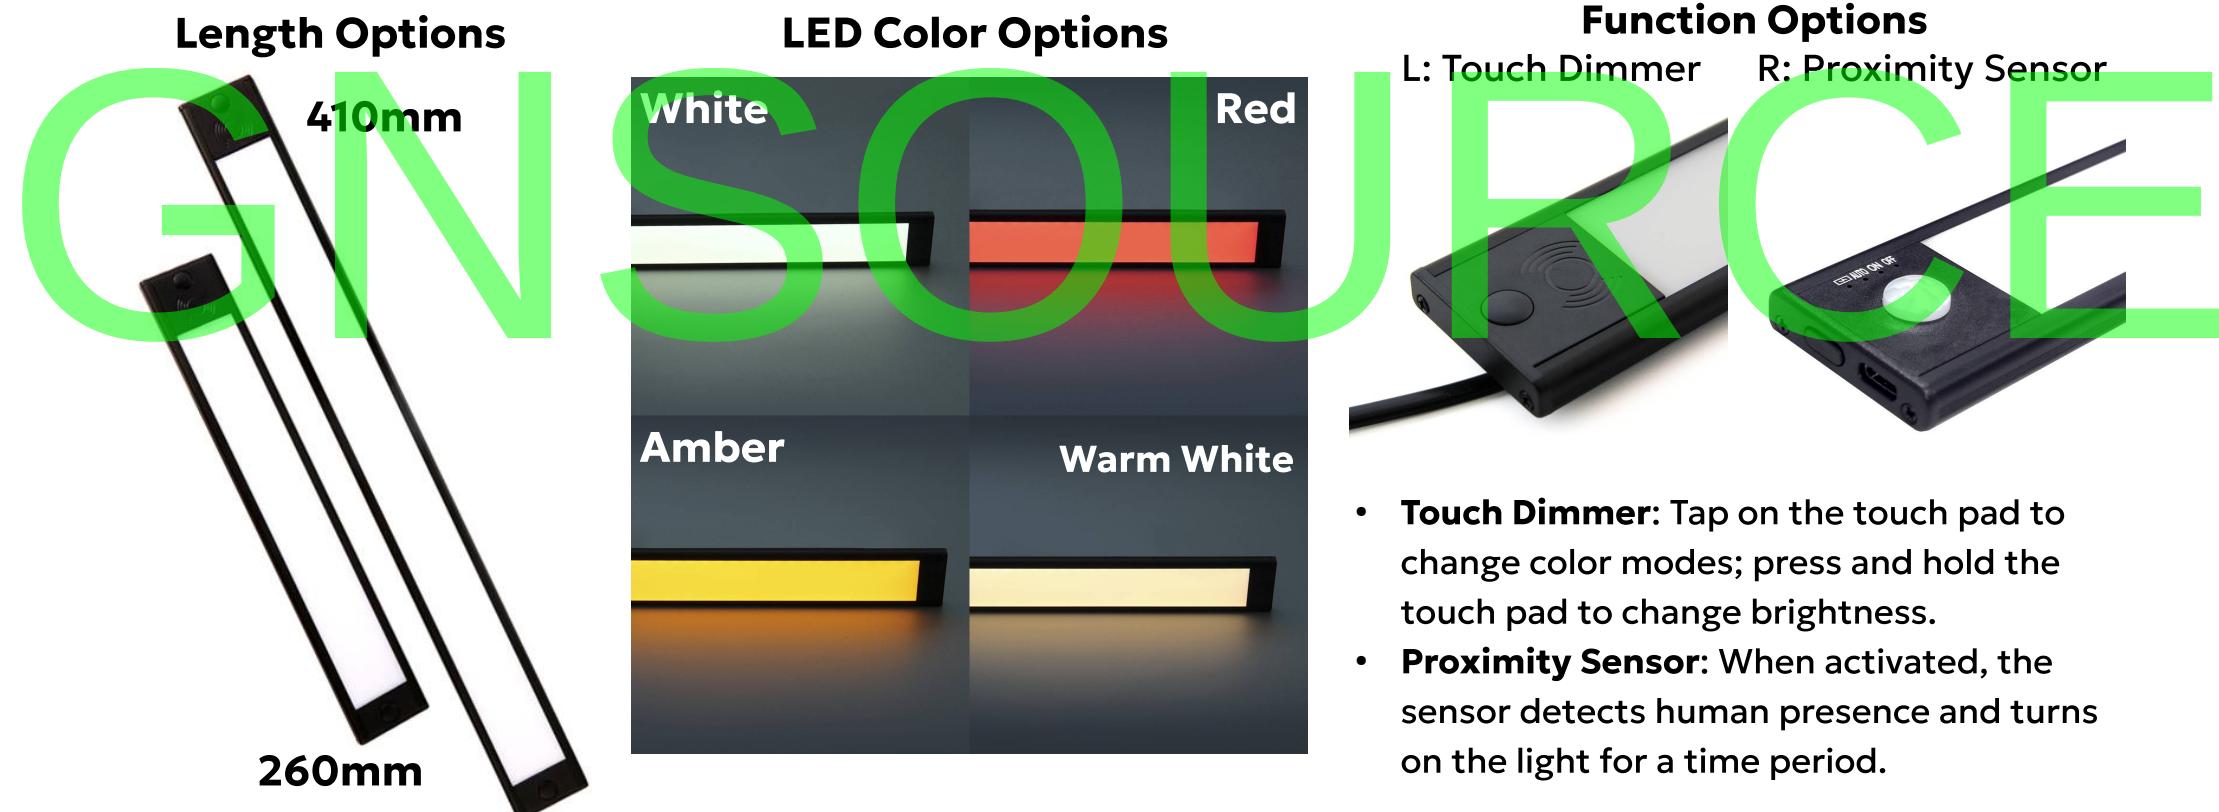


INSTALLATION

12V Touch Dimmer Model

Wiring:

2 flying leads with pre-tinned tips

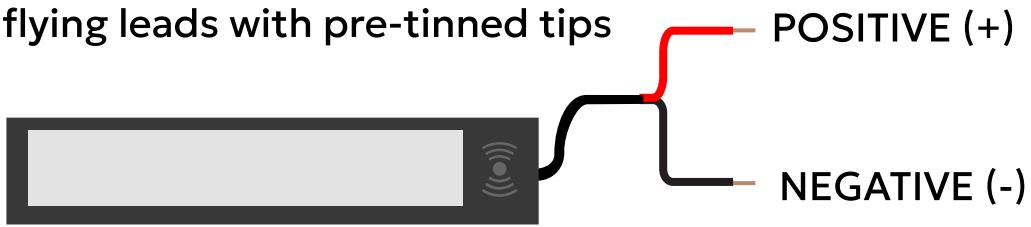

Mounting:

Screw mounts with rubber cover




GNSOURCE

5V Rechargeable Sensor Model

Wiring:

None or USB charging cable



USB Type-C to USB-A
Charging Cable

Mounting:

Magnet mounts + adhesive steel brackets



CUSTOMIZATIONS



- **Packaging:**
 - **Standard packaging:** White cardboard boxes
 - **Custom packaging:** Custom printed cardboard boxes, etc.
- **Logo printing:** Printed logo on housing, etc.
- **Wiring:** Various wire lengths and connection options available



Standard boxes



Custom boxes

WARNING



- 1. The lights must be used only for the prescribed purpose.** To use the lights properly, please closely observe the instructions found in the manual. Any uses outside those mentioned in the manual will be considered misuse. **The manufacturer shall not be liable for any damage or injuries resulting from misuse.**
- 2. Keep children away from electrical equipment.** Make sure the children are under supervision when operating the lights.

3. Do not use any power supply that outputs any voltage outside of the lights' nominal voltage range. Over-voltage can cause irreversible circuitry damage and even fires.

- 4. Do not use the lights in the temperature outside of the operational range.**
- 5. Do not clean your lights with water or harsh detergents.**



Your LED lighting partner.

Shenzhen Green New Source Lights Technology Co., Ltd.

Website: www.gnsourcegroup.com Email: info@gnsource.cn

Phone: +86(0755) 2374 7167

Wechat/Whatsapp: +86 183 1906 2536



MADE IN CHINA